ARUBA | ARUBA DOUBLE

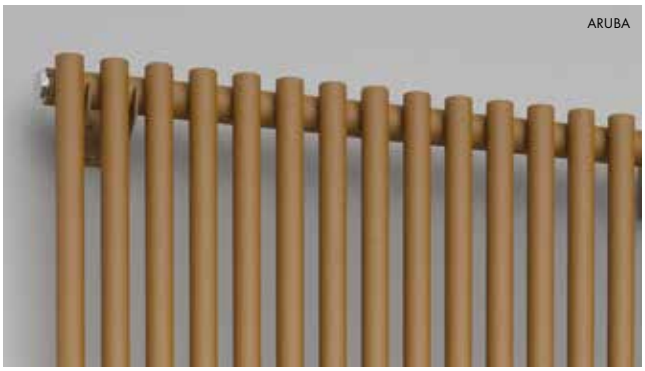
ARUBA

ARUBA DOUBLE 1800 × 600

ARUBA

Material	steel pipes ∅ 28 mm / steel pipes ∅ 22 mm
Connection thread	4 × G1/2"
Testing overpressure	1,3 MPa
Max. operating overpressure	1,0 MPa
Max. operating temperature	110 °C
Number of pipes	8, 13 17

ARUBA DOUBLE

Material	steel pipes ∅ 28 mm / steel pipes ∅ 22 mm
Connection thread	4 × G1/2"
Testing overpressure	1,3 MPa
Max. operating overpressure	1,0 MPa
Max. operating temperature	110 °C
Number of pipes	16, 26, 34

ARUBA

Type H/L [mm]	Depth B [mm]	Weight [kg]	Water capacity [l]	Temperature exponent [–]	Heating Output [W] 75/65/20°C	70/55/20°C	55/45/20°C	Recommended power input paint [W]	chrome [W]	Connection span [mm]
1800/300	49	10,0	5,1	1,291	**530**	430	274	–	–	mc 50
1800/480	49	16,5	8,3	1,291	**855**	693	442	–	–	mc 50
1800/600	49	21,0	10,9	1,291	**1064**	862	550	–	–	mc 50

ARUBA DOUBLE

Type H/L [mm]	Depth B1 [mm]	Weight [kg]	Water capacity [l]	Temperature exponent [–]	Heating Output [W] 75/65/20°C	70/55/20°C	55/45/20°C	Recommended power input paint [W]	chrome [W]	Connection span [mm]
1800/300	70	19,5	10,0	1,307	**834**	674	433	–	–	mc 50
1800/480	70	31,5	16,3	1,307	**1334**	1079	693	–	–	mc 50
1800/600	70	40,5	21,2	1,307	**1667**	1348	866	–	–	mc 50

Thermal power measuring follows in accordance with EN 442. The weight of radiator is listed without water and package.
Accessories (page 72, 73 and 74) is not part of the radiator.


Connection options



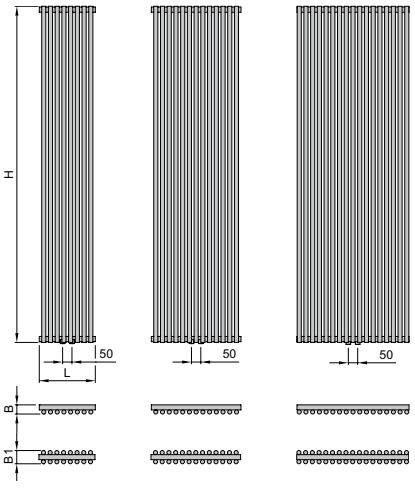

DARU 1800 0300...
DARD 1800 0300...

DARU 1800 0480...
DARD 1800 0480...

DARU 1800 0600...
DARD 1800 0600...